Norsk Gummi AS

Ruudgata 4
3073 SANDE I VESTFOLD

Telefon: +47 917 35 312

E-post: post@norskgummi.no

Matting

Our range of Anti-Skid Mats includes versatile options for various applications. These mats offer excellent shock absorption, slip resistance, and enhanced walking comfort. Flooring mats with anti-skid ridges help prevent slips and falls, while a protective nonstick finish ensures easy cleaning and maintenance.

Quality rubber solutions.



Matting

Cobra

Quality	NR/SBR
Colour	Black
Surface	One side fine, other side rough fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A ± 5
Tensile strength	3 MPa
Elongation at break	200 %
Features	Excellent anti-slip properties, available in various widths up to 2 meters.
Application	Car trunks, horse trailers, entrances etc.

Thickness (mm)	Insertion(s)	Insertion type	Width (mm)	Length (mm)	Article code
3	0	-	1.600	10.000	SX70150C 3/0
3	0	-	1.700	10.000	SX70150C 3/0
3	0	-	1.800	10.000	SX70150C 3/0
3	0	-	2.000	10.000	SX70150C 3/0
4	2	nylon	2.000	10.000	SX70150C 4/2
5	0	-	2.000	10.000	SX70150C 5/0
6	2	nylon	1.450	12.000	SX70150C 6/2
6	2	nylon	1.700	12.000	SX70150C 6/2
6	2	nylon	2.000	10.000	SX70150C 6/2
8	1	nylon	1.700	12.000	SX70150C 8/1
8	1	nylon	2.000	10.000	SX70150C 8/1



Matting

Feniks Insulation Fine Rib Mat

Quality	EPDM/SBR
Surface	One side fine rib design, other side fabric finish
Temperature range	-25 °C to +120 °C
Specific gravity	1,5 g/cm³
Hardness	75 Shore A ± 5
Tensile strength	5 MPa
Elongation at break	200 %
Features	Strong and abrasion resistant. Electrically insulating according to the standard IEC 61111:2009, DIN EN 61111 (VDE 0682-512):2010-03, EN 61111:2009, IEC 60243-1:2013.
Application	Industrial plants, commercial buildings, power stations, and other electrical facilities.

Class	Colour	Thickness (mm)	Proof Test Voltage	Resistance	Maximum use voltage	Width (mm)	Length (mm)	Article code
2	Grey	3	20 kV	30 kV	17 kV	1.000	10.000	ELS30000G 3/0
2	Grey	3	20 kV	30 kV	17 kV	1.200	10.000	ELS30000G 3/0
2	Black	3	20 kV	30 kV	17 kV	1.000	10.000	ELS30000B 3/0
4	Grey	4,5	40 kV	50 kV	36 kV	1.000	10.000	ELS50000G 4,5/0
4	Grey	4,5	40 kV	50 kV	36 kV	1.200	10.000	ELS50000G 4,5/0

*This product is on request available per linear meter.



Matting

Feniks Isocarpet

Quality	EPDM/SBR
Colour	Orange
Surface	One side smooth finish, other side fabric finish
Temperature range	-40 °C to +70 °C
Specific gravity	1,15 g/cm³
Hardness	60 Shore A ± 5
Tensile strength	16 MPa
Elongation at break	600 %
Features	Strong and abrasion resistant. Electrically insulating according to the standard IEC 61111:2009, IEC 60112.
Application	Industrial plants, commercial buildings, power stations, and other electrical facilities.

Class	Thickness (mm)	Proof Test Voltage	Resistance	Maximum use voltage	Width (mm)	Length (mm)	Article code
0	1,6	5 kV	10 kV	1 kV	1.000	10.000	ELS1000V 1,6/0



Matting

Feniks Insulation Checker Mat

Quality	EPDM/SBR
Colour	Grey
Surface	One side five tear checker design, other side fabric finish
Temperature range	-25 °C to +120 °C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A ± 5
Tensile strength	5 MPa
Elongation at break	250 %
Features	Strong and abrasion resistant. Electrically insulating according to the standard IEC 61111:2009, DIN EN 61111 (VDE 0682-512):2010-03, EN 61111:2009, IEC 60243-1:2013.
Application	Industrial plants, commercial buildings, power stations, and other electrical facilities.

Class	Thickness (mm)	Proof Test Voltage	Resistance	Maximum use voltage	Width (mm)	Length (mm)	Article code
2	3	20 kV	30 kV	17 kV	1.400	10.000	CD65ELSG 3/0



Matting

Saturn Fine Rib

Quality	NR/SBR
Colour	Black
Surface	One side fine rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Insertion(s)	Insertion type	Width (mm)	Length (mm)	Article code
3	0	-	1.000	10.000	MR65 3/0
3	0	-	1.200	10.000	MR65 3/0
3	0	-	1.400	10.000	MR65 3/0
3	1	cotton	1.000	10.000	MR65 3/1
3	1	cotton	1.200	10.000	MR65 3/1
4	0	-	1.000	10.000	MR65 4/0
4	0	-	1.200	10.000	MR65 4/0



Matting

Saturn Fine Rib Grey

Quality	NR/SBR
Colour	Grey
Surface	One side fine rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Insertion(s)	Insertion type	Width (mm)	Length (mm)	Article code
3	0	-	1.000	10.000	MR65G 3/0
3	0	-	1.200	10.000	MR65G 3/0
3	0	-	1.400	10.000	MR65G 3/0



Matting

Saturn Basic Fine Rib

Quality	NR/SBR
Colour	Black
Surface	One side fine rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
2,7	200	10.000	MR65SX 2,7/0-0,2
2,7	300	10.000	MR65SX 2,7/0-0,3
2,7	400	10.000	MR65SX 2,7/0-0,4
2,7	500	10.000	MR65SX 2,7/0-0,5
2,7	600	10.000	MR65SX 2,7/0-0,6
2,7	700	10.000	MR65SX 2,7/0-0,7
2,7	800	10.000	MR65SX 2,7/0-0,8
2,7	900	10.000	MR65SX 2,7/0-0,9
2,7	1.000	10.000	MR65SX 2,7/0
2,7	1.200	10.000	MR65SX 2,7/0
2,7	1.400	10.000	MR65SX 2,7/0
2,7	1.500	10.000	MR65SX 2,7/0



Matting

Saturn Fine Rib NBR

Quality	NBR/SBR
Colour	Black
Surface	One side fine rib design, other side fabric finish
Temperature range	-30 °C to +90 °C
Specific gravity	1,45 g/cm³
Hardness	70 Shore A ± 5
Tensile strength	4 MPa
Elongation at break	200 %
Features	Wear resistant with anti-slip and sound-absorbing properties. Oil and grease resistant.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
2,7	1.000	10.000	MR65NBR 2,7/0
2,7	1.200	10.000	MR65NBR 2,7/0



Matting

Saturn Eco Fine Rib

Quality	NR/SBR
Colour	Black
Surface	One side fine rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
2,5	1.000	10.000	MN65 2,5/0
2,5	1.200	10.000	MN65 2,5/0



Matting

Athena Broad Rib

Quality	NR/SBR
Colour	Black
Surface	One side broad rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	CR65 3/0
3	1.200	10.000	CR65 3/0
3	1.400	10.000	CR65 3/0
3	1.500	10.000	CR65 3/0



Matting

Freya Block Rib

Quality	NR/SBR
Colour	Black
Surface	One side block rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.200	10.000	LS65 3/0



Matting

Hurricane Wide Rib

Quality	NR/SBR
Colour	Black
Surface	One side wide rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
5	1.000	10.000	BR65 5/0
5	1.200	10.000	BR65 5/0
6	1.000	10.000	BR65 6/0
6	1.200	10.000	BR65 6/0



Matting

Hurricane Eco Wide Rib

Quality	NR/SBR
Colour	Black
Surface	One side wide rib design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3 MPa
Elongation at break	200 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
5	1.000	10.000	BR65SX 5/0
5	1.200	10.000	BR65SX 5/0
6	1.000	10.000	BR65SX 6/0
6	1.200	10.000	BR65SX 6/0



Matting

Hector Truck Rib

Quality	NR/SBR
Colour	Black
Surface	One side deep wide rib design, other side fabric finish
Temperature range	-30 °C to +90 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Prevention of sliding cargo and damage to the truck beds.

Thickness (mm)	Insertion(s)	Insertion type	Width (mm)	Length (mm)	Article code
4,5	0	-	2.000	10.000	TL65 4,5/0
6	0	-	2.000	10.000	TL65 6/0
6	2	nylon	1.600	10.000	TL65 6/2



Matting

Vidar Coin Mat

Quality	NR/SBR
Colour	Black
Surface	One side raised circular design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Indoor application such as airports, hotels, cabins, exhibitions etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	CS80 3/0
3	1.200	10.000	CS80 3/0
4	1.200	10.000	CS80 4/0
4,5	1.000	10.000	CS80 4,5/0
4,5	1.200	10.000	CS80 4,5/0



Matting

Vidar Coin Mat

Quality	NR/SBR
Surface	One side raised circular design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Indoor application such as airports, hotels, cabins, exhibitions etc.

Thickness (mm)	Width (mm)	Length (mm)	Colour	Article code
3	1.200	10.000	Grey	CS80G 3/0
3	1.200	10.000	Blue	CS80BL 3/0
3	1.200	10.000	Brown	CS80BR 3/0
3	1.200	10.000	Green	CS80GR 3/0
3	1.200	10.000	Red	CS80R 3/0
3	1.200	10.000	Yellow	CS80Y 3/0



Matting

Vidar Eco Coin Mat

Quality	NR/SBR
Colour	Black
Surface	One side raised circular design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Indoor application such as airports, hotels, cabins, exhibitions etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	500	10.000	CS65SX 3/0-0,5
3	600	10.000	CS65SX 3/0-0,6
3	700	10.000	CS65SX 3/0-0,7
3	800	10.000	CS65SX 3/0-0,8
3	1.000	10.000	CS65SX 3/0
3	1.200	10.000	CS65SX 3/0
3	1.400	10.000	CS65SX 3/0
3	1.500	10.000	CS65SX 3/0

For more specialised rubber solutions visit **ZenithEurope.com**



Matting

Odin Checker Mat

Quality	NR/SBR
Colour	Black
Surface	One side five tear checker design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Car trunks, horse trailers, entrances etc.

Thickness (mm)	Insertion(s)	Insertion type	Width (mm)	Length (mm)	Article code
3	0	-	1.000	10.000	CD65 3/0
3	0	-	1.200	10.000	CD65 3/0
3	0	-	1.400	10.000	CD65 3/0
3	1	cotton	1.400	10.000	CD65 3/1
3	0	-	1.500	10.000	CD65 3/0
3	0	-	1.600	10.000	CD65 3/0
5	0	-	1.400	10.000	CD65 5/0



Matting

Odin Checker Mat

Quality	NR/SBR
Surface	One side five tear checker design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Car trunks, horse trailers, entrances etc.

Thickness (mm)	Width (mm)	Length (mm)	Colour	Article code
3	1.400	10.000	Grey	CD65G 3/0
3	1.500	10.000	Beige	CD65B 3/0
3	1.500	10.000	Yellow	CD65Y 3/0



Matting

Odin Eco Checker Mat

Quality	NR/SBR
Colour	Black
Surface	One side five tear checker design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3 MPa
Elongation at break	200 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Car trunks, horse trailers, entrances etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	400	10.000	CD65SX 3/0-0,4
3	500	10.000	CD65SX 3/0-0,5
3	600	10.000	CD65SX 3/0-0,6
3	700	10.000	CD65SX 3/0-0,7
3	800	10.000	CD65SX 3/0-0,8
3	1.000	10.000	CD65SX 3/0
.3	1.200	10.000	CD65SX 3/0
3	1.400	10.000	CD65SX 3/0
3	1.500	10.000	CD65SX 3/0
3	1.600	10.000	CD65SX 3/0
5	1.400	10.000	CD65SX 5/0




Matting

Odin Checker Mat NBR

Quality	NBR/SBR
Colour	Black
Surface	One side five tear checker design, other side fabric finish
Temperature range	-30 °C to +90 °C
Specific gravity	1,45 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties. Oil and grease resistant.
Application	Car trunks, horse trailers, entrances etc.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.400	10.000	CD65NBR 3/0

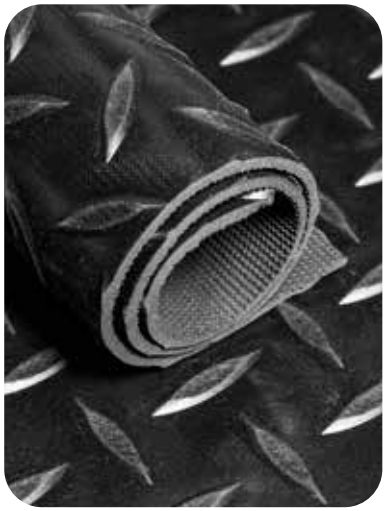

Matting

Seltos Diamond Checker

Quality	NR/SBR
Colour	Black
Surface	One side tear design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3 MPa
Elongation at break	200 %
Features	Wear-resistant with anti-slip and sound-absorbing properties. Available in various widths up to 2.2 meters.
Application	Car trunks, horse trailers, entrances etc.

Thickness (mm)	Insertion(s)	Insertion type	Width (mm)	Length (mm)	Article code
3	0	-	1.000	10.000	DCD65 3/0
3	0	-	1.200	10.000	DCD65 3/0
3	0	-	1.500	10.000	DCD65 3/0
3	0	-	1.600	10.000	DCD65 3/0
3	0	-	1.700	10.000	DCD65 3/0
3	0	-	1.800	10.000	DCD65 3/0
3	0	-	1.900	10.000	DCD65 3/0
3	0	-	2.000	10.000	DCD65 3/0
3	0	-	2.200	10.000	DCD65 3/0
5	0	-	1.000	10.000	DCD65 5/0
5	0	-	2.000	10.000	DCD65 5/0
6	2	nylon	2.000	10.000	DCD65 6/2
8	1	nylon	2.000	10.000	DCD65 8/1



Matting

Sphynx Pyramid Mat

Quality	NR/SBR
Surface	One side relief pyramide design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Colour	Article code
3	1.000	10.000	Black	SD65 3/0
3	1.200	10.000	Black	SD65 3/0
3	1.200	10.000	Grey	SD65G 3/0



Matting

Amoeba Mat

Quality	NR/SBR
Colour	Black
Surface	One side orange peel design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.200	10.000	AM65 3/0
3	1.500	10.000	AM65 3/0




Matting

Zenith Diamond Mat

Quality	NR/SBR
Surface	One side relief diamond design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A ± 5
Tensile strength	3,5 MPa
Elongation at break	250 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Colour	Article code
3	1.200	10.000	Black	DD65 3/0
3	1.200	10.000	Grey	DD65 3/0

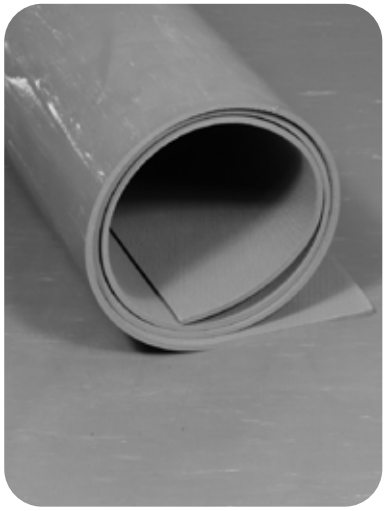

Matting

Zeus Marble Mat

Quality	NR/SBR
Surface	One side marble design, other side fabric finish
Temperature range	-30 °C to +70 °C
Specific gravity	1,45 g/cm³
Hardness	80 Shore A ± 5
Tensile strength	8 MPa
Elongation at break	300 %
Features	Wear resistant with anti-slip and sound-absorbing properties.
Application	Workbenches, general-purpose areas, veterinarian and pet groomer table covers.

Thickness (mm)	Width (mm)	Length (mm)	Colour	Article code
2,5	1.200	10.000	Grey	SB80145G 2,5/0
2,5	1.400	10.000	Grey	SB80145G 2,5/0
2,5	1.200	10.000	Black	SB80145B 2,5/0



Matting

Novibramat

Quality	NR/SBR
Colour	Black
Surface	Both sides block rib design
Temperature range	-30 °C to +70 °C
Specific gravity	1,35 g/cm³
Tensile strength	5 MPa
Elongation at break	300 %
Max load	8 kg/cm²
Features	Anti-vibration properties through the dual-sided rib design with a 90-degree orientation.
Application	Machine vibration dampening and noise reduction.

Hardness (Shore A ± 5)	Thickness (mm)	Width (mm)	Length (mm)	Article code
45	8	500	500	AV45 8/0-0,5
45	8	1.000	1.000	AV45 8/0-1
45	10	500	500	AV45 10/0-0,5
45	10	1.000	1.000	AV45 10/0-1
70	8	500	500	AV70 8/0-0,5
70	8	1.000	1.000	AV70 8/0-1
70	10	500	500	AV70 10/0-0,5
70	10	1.000	1.000	AV70 10/0-1



Matting

We provide a variety of Anti-Skid Mats for multipurpose use. Our mats are excellent in shock absorption and slip resistance as well as providing improved walking comforts. Flooring mats with anti-skid ridges prevent slips & falls and come with a protective, non-stick finish to make cleaning quick and easy.

F



Rubber Matting

Fine Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
3	0	1.000	10.000	FR 3/0
3	0	1.200	10.000	FR 3/0
3	0	1.800	10.000	FR 3/0-1,8
3	0	2.000	10.000	FR 3/0-2
3	1	1.200	10.000	FR 3/1




Rubber Matting

Combi Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose. areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.200	10.000	COMR 3/0
3	1.400	10.000	COMR 3/0
3	1.500	10.000	COMR 3/0

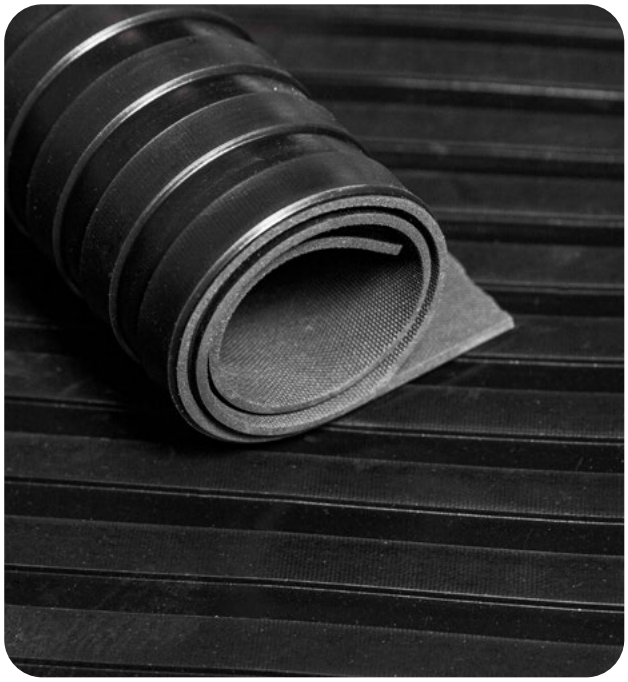

Rubber Matting

Broad Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	MR 3/0
3	1.200	10.000	MR 3/0



Rubber Matting

Wide Rib design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Anti-slip wide ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, airports, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
6	1.000	10.000	WR 6/0
6	1.000	5.000	WR 6/0
6	1.200	10.000	WR 6/0




Rubber Matting

Fishbone design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Fishbone pattern ribbed surface on one side and a fine cloth impression pattern on the other side.
Application	Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	FM 3/0
3	1.200	10.000	FM 3/0

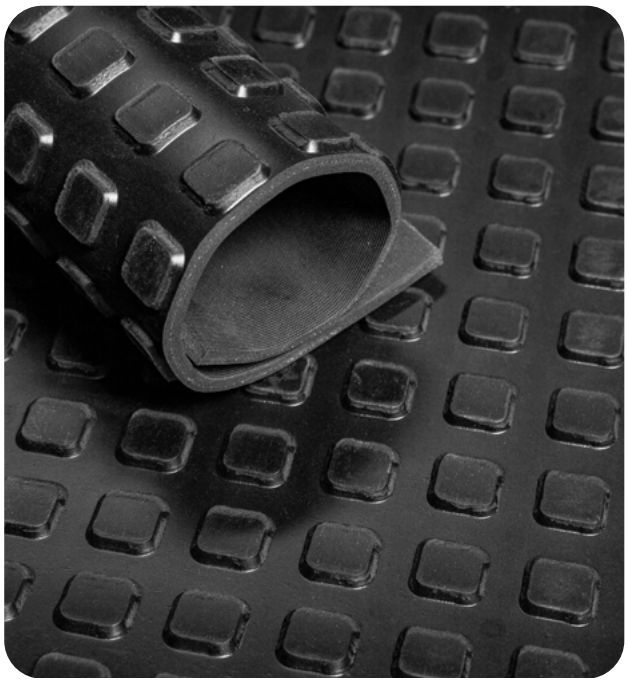

Rubber Matting

Square Stud design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Raised square design surface on one side and a fine cloth impression pattern on the other side with one cotton insertion.
Application	Heavy duty application such as horsetrailers, machines, stables, et cetera.

Thickness (mm)	Insertion(s) (no.)	Width (mm)	Length (mm)	Article code
8	1	1.000	10.000	KM 8/1
8	1	1.200	10.000	KM 8/1



Rubber Matting

Stud design

Quality	NR/SBR
Colour	Black
Stud diameter	25 mm
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%

Features Raised circular design surface on one side and a fine cloth impression pattern on the other side.

Application Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	SM 3/0
3	1.200	10.000	SM 3/0
3	1.400	10.000	SM 3/0
3	1.500	10.000	SM 3/0
3	2.000	10.000	SM 3/0-2
3	400	10.000	SM 3/0-0,4
3	500	10.000	SM 3/0-0,5
3	600	10.000	SM 3/0-0,6
3	700	10.000	SM 3/0-0,7
3	800	10.000	SM 3/0-0,8
4	1.200	10.000	SM 4/0



Rubber Matting

Stud design IN45

Quality	NR/SBR
Colour	Black
Stud diameter	20 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	7,5 MPa
Elongation at break	250%
Features	Raised circular design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
4,5	1.000	10.000	IN45 4,5/0



Rubber Matting

Stud design 4012

Quality	NR/SBR
Stud diameter	12 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	7,5 MPa
Elongation at break	250%
Features	Raised circular design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

F

Thickness (mm)	Colour	Width (mm)	Length (mm)	Article code
4	Black	1.500	10.000	4012 4/0
4	Grey	1.500	10.000	4012G 4/0




Rubber Matting

Stud design Nobra

Quality	NR/SBR
Colour	Black
Stud diameter	28 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	7,5 MPa
Elongation at break	250%
Features	Raised circular design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
4	1.450	10.000	NOBRA 4/0

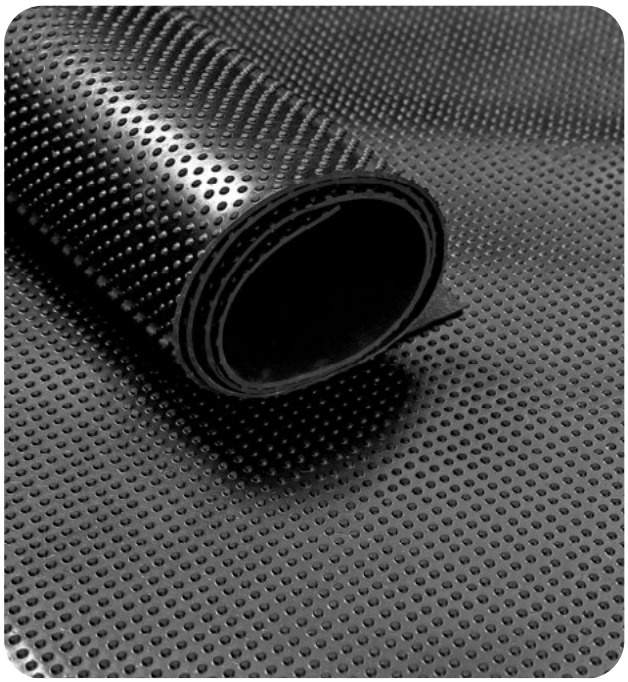

Rubber Matting

Mini Stud design

Quality	NR/SBR
Colour	Black
Stud diameter	3 mm
Temperature range	-20° to +90°C
Specific gravity	1,5 g/cm³
Hardness	80 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	250%
Features	Mini Stud design surface on one side and a fine cloth impression pattern on the other side.
Application	Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.200	10.000	SMM 3/0



Rubber Matting

Checker design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Floormat with continues tear field design on one side and a fine cloth impression pattern on the other side.
Application	Car trunks, horse trailers, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.000	10.000	CM 3/0
3	1.200	10.000	CM 3/0
3	1.400	10.000	CM 3/0
3	2.000	10.000	CM 3/0-2
5	1.400	10.000	CM 5/0
5	2.000	10.000	CM 5/0-2



Rubber Matting

Diamond design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	70 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Floormat with continues tear field design on one side and a fine cloth impression pattern on the other side.
Application	Car trunks, horse trailers, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
3	1.500	10.000	DM 3/0



Rubber Matting

Hammerblow design

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	75 Shore A +/- 5
Tensile strength	6 MPa
Elongation at break	250%
Features	Floormat with hammerblow design on one side and a fine cloth impression pattern on the other side.
Application	Car trunks, horse trailers, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
6	1.650	10	HM 6/0
6	1.800	10	HM 6/0
6	2.000	10	HM 6/0
8	1.650	10	HM 8/0
8	1.800	10	HM 8/0
8	2.000	10	HM 8/0
10	1.800	10	HM 10/0
10	2.000	10	HM 10/0
10	2.500	10	HM 10/0-2,5



Rubber Matting

Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
22	400	600	RM 22/0-0,4x0,6
22	500	1.000	RM 22/0-0,5x1
22	750	1.000	RM 22/0-0,75x1
22	800	1.200	RM 22/0-0,8x1,2
22	1.000	1.000	RM 22/0-1x1
22	1.500	1.000	RM 22/0-1,5x1

F



Rubber Matting

Ring Mat on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
22	400	10.000	RMR 22/0-0,4
22	500	10.500	RMR 22/0-0,5
22	600	10.000	RMR 22/0-0,6
22	800	9.600	RMR 22/0-0,8
22	1.000	10.500	RMR 22/0-1
22	1.200	10.000	RMR 22/0-1,2
22	1.500	10.000	RMR 22/0-1,5



Rubber Matting

Heavy Duty Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
23	750	1.000	RMH 23/0-0,75x1
23	1.500	1.000	RMH 23/0-1,5x1



Rubber Matting

Heavy Duty Ring Mat on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways and entrances et cetera.

F

Thickness (mm)	Width (mm)	Length (mm)	Article code
23	1.000	10.500	RMHR 23/0



Rubber Matting

Ring Mat on roll light

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat.
Application	Workplaces, walkways, entrances, pools et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
10	900	10.000	RMR 10/0-0,9
10	1.830	10.000	RMR 10/0-1,83



Rubber Matting

Entrance Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat with sloping edge.
Application	Workplaces, restaurants, walkways, entrances et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
12	900	1.500	RME 12/0



Rubber Matting

Connective Ring Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,2 g/cm³
Hardness	50 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean hollow profile mat with sloping edge.
Application	Workplaces, restaurants, walkways, entrances, et cetera.

Thickness (mm)	Width (mm)	Length (mm)	Article code
14	900	900	RMS 14/0



Rubber Matting

Stable Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	55 Shore A +/- 5
Tensile strength	3 MPa
Elongation at break	200%
Features	Easy to clean anti-slip hammerblow profile mat with on the bottom groves for effective drainage.
Application	Flooring for stables and shelters.

F

Thickness (mm)	Width (mm)	Length (mm)	Article code
17	1.220	1.830	SBM 17/0
17	900	1.200	SBMS 17/0



Rubber Matting

Cow Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	55 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Anti-slip and easy to clean interlocking diamond profile mat with with a damping construction for more comfort.
Application	Stable flooring.

Thickness (mm)	Width (mm)	Length (mtm	Article code
23	1.830	1.220	SBC 23/0



Rubber Matting

Trailer Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +70°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Easy to clean and anti-slip.
Application	Improve trailer access and comfort for horses.

Thickness (mm)	Width (mm)	Length (mm)	Article code
17	1.550	1.750	LM 17/0
27	1.200	2.400	TM 27/0



Rubber Matting

Workplace Mat

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	anti-fatigue mat with a distinctive bubbled surface.
Application	reducing fatigue, increasing productivity and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	600	900	WP 15/0-0,6x0,9
15	900	1.200	WP 15/0-0,9x1,2
15	900	1.500	WP 15/0-0,9x1,5



Rubber Matting

Workplace Mat on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	anti-fatigue mat with a distinctive bubbled surface.
Application	reducing fatigue, increasing productivity and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	900	10.000	WPR 15/0

F



Rubber Matting

Workplace Mat with yellow border

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Anti-fatigue mat with a distinctive bubbled surface.
Application	Reducing fatigue, increasing productivity, and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	900	1.200	WPY 15/0-0,9x1,2
15	600	900	WPY 15/0-0,6x0,9



Rubber Matting

Workplace Mat with yellow border on roll

Quality	NR/SBR
Colour	Black
Temperature range	-20° to +50°C
Specific gravity	1,5 g/cm³
Hardness	65 Shore A +/- 5
Tensile strength	3 Mpa
Elongation at break	200%
Features	Anti-fatigue mat with a distinctive bubbled surface.
Application	Reducing fatigue, increasing productivity, and promoting a safer work environment.

Thickness (mm)	Width (mm)	Length (mm)	Article code
15	910	10.000	WPYR 15/0